



## PRP-010.010 LDM PLASTIC PRISM REFLECTOR



- **Laser Distance Meter Plastic Prism Reflector**
- **For use with the ELDP and MDHD Family of Laser Distance Meters.**
- **For a range of 16 meters (52.5 feet)**
- **Overall Size: 150 mm x 150 mm (5.9" x 5.9")**

### Features

- High Gain Plastic Prism Reflector
- Secondary Environmental Enclosures are available including air purged, and water cooled.
- Adjustable Mounting Platform, providing Vertical and Horizontal Axis Adjustments.

### ELDP & MDHD Product Family

- ELDP10 for measurements to a reflector panel at distances over 80M or to natural surfaces up to 20M.
- MDHD100 for measurements to a reflector panel at distances up to 800M or to natural surfaces up to 155M.
- MDHD600 for measurements to a reflector panel at distances up to 600M & Glass Prism reflectors up to 1200M.

### Typical Applications

- Crane applications in areas where a reliable High Gain Reflector is required.
- Any Laser Distance Meter application in areas where a High Gain Reflector is required.

### Description

The PRP-010.010 Laser Distance Meter Plastic Prism Reflector for a range of up to 16 meters (52.5 feet) for the ELDP10, MDHD100 and the MDHD600. The Reflector size is 100 mm x 100mm (3.94" x 3.94") and the overall size is 150 mm x 150 mm (5.9" x 5.9").

## MODULOC<sup>®</sup> Technology - The Total Laser Solution

### MODULOC<sup>®</sup> Control Systems Ltd.


Wheathamstead, Hertfordshire, AL4 8SB United Kingdom  
Phone: +44 (0)845 8736501 FAX: +44 (0)1582 831980  
E-Mail: sales@moduloc-intl.com Website: www.moduloc-intl.com

### MODULOC<sup>®</sup> Control Systems, Inc.

2808 Broadway Blvd. - Suite 201B, Monroeville, PA 15146 USA  
Phone: 412-824-1260 FAX: 412-824-8890  
E-Mail: sales@moduloc-usa.com Website: www.moduloc-usa.com

**PRP-010.010 Dimensional Info**

**Weight:** 1 kg (2.2 Lbs.)

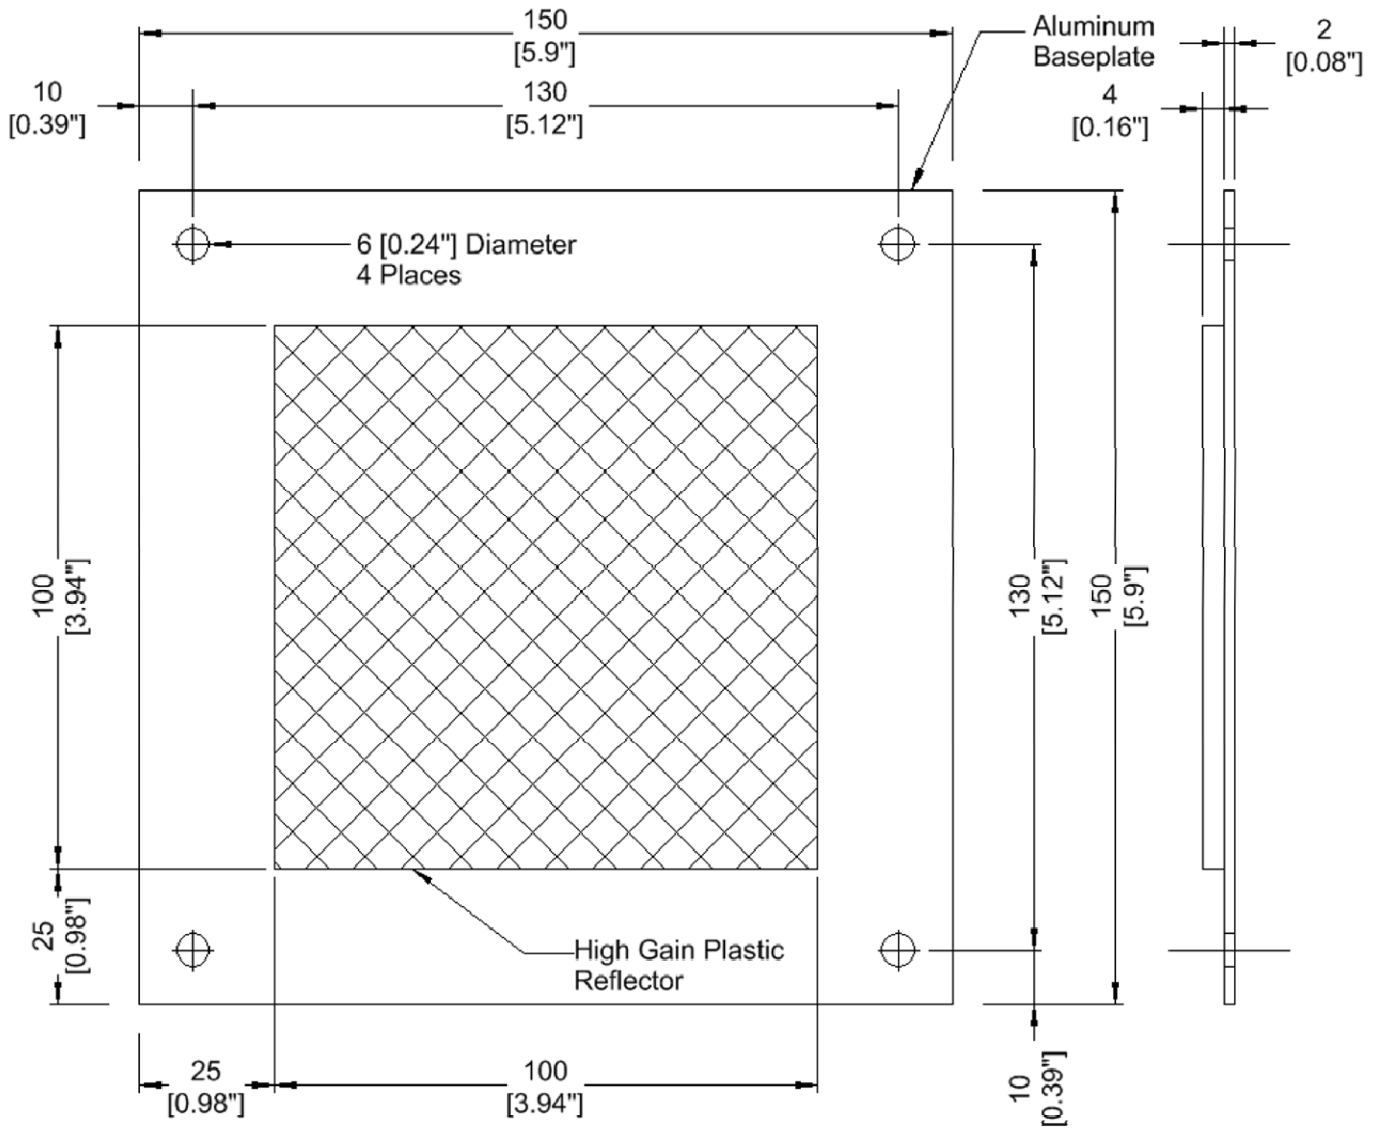

Dimensions are in mm's.

**MODULOC<sup>®</sup> Technology - The Total Laser Solution**

**MODULOC<sup>®</sup>**  
Control Systems

Your Local Sales Representative:



We reserve the right to alter specifications without prior notice. Specifications without tolerances are typical values.