




MD9100 REMOTE HOT METAL DETECTOR SPOT LENS & LENS HOLDER

Part No. BPA-27 Purged Lens Holder, Aluminum Housing provides air cooling and purging. For use with F4 (4°) & F7 (7°) Fiber Optic Spot lenses.

Part No. F4 Fiber Optic Spot Lens, 4° F.O.V., 25mm Diameter Stainless Steel Housing, 180°C (356°F) Rating.

Part No. LG-XX-AB Fiber Optic Cable, Stainless Steel Outer Sheath, XX Meter Length, 180°C (356°F) Rating. Available in lengths of 2, 3, 4, 5, 6, 7, 8, 9 & 10 Meters.

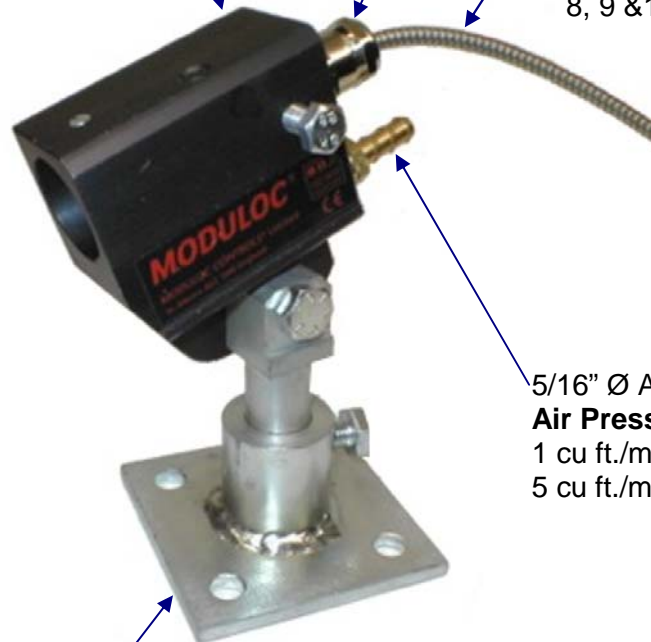

5/16" Ø Air Inlet

Air Pressure Requirements:

1 cu ft./min at 5 PSI for normal conditions
5 cu ft./min at 15 PSI for severe conditions

Part No. LSS-36 Universal Swivel/Lift Mounting Stand. Provides 25 mm height adjustment, +/- 45° vertical swivel and up to 360° horizontal rotation.

Description: F4 Fiber Optic Spot Lens mounted in a BPA-27 Purged Lens Holder along with a LSS-36 Universal Swivel Mounting Stand and a LG-XX-AB Fiber Optic Cable.

MODULOC[®] Technology - The Total Sensor Solution

MODULOC[®] Control Systems Ltd.

St. Albans, Hertfordshire AL2 1JG United Kingdom
Phone: +44 (0)1727 821313 FAX: +44 (0)1727 826804
E-Mail: sales@moduloc-intl.com Website: www.moduloc-intl.com

MODULOC[®] Control Systems, Inc.

2808 Broadway Blvd. - Suite 201B, Monroeville, PA 15146 USA
Phone: 412-824-1260 FAX: 412-824-8890
E-Mail: sales@moduloc-usa.com Website: www.moduloc-usa.com